

# Hellenbrand®

What's In Your Water?™




## When you want to protect your family completely

### Hellenbrand's Whole House Reverse Osmosis System

- Removes unwanted contaminants
- Provides premium quality drinking water throughout your entire home
- Removes hardness without the use of salt
- Low maintenance, minimum energy consumption
- Multiple pre-treatment options



# Hellenbrand's Whole House RO System

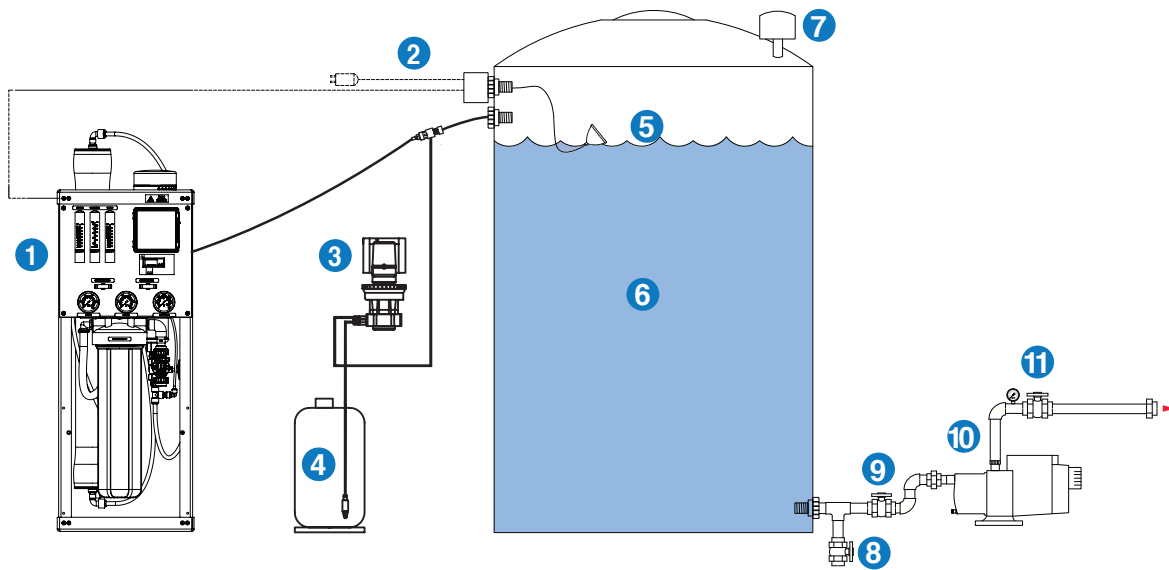

Hellenbrand's Whole House RO System					
1	<b>Reverse Osmosis</b>	Purifies Water	7	<b>Air Vent</b>	Filters Air
2	<b>Power</b>	Power for RO System	8	<b>Drain Valve</b>	Drains Storage Tank
3	<b>Chemical Feed Pump</b>	Delivers pH Correction Fluid	9	<b>Feed Valve</b>	Shuts Off Supply to Pump
4	<b>Solution Tank</b>	Stores pH Correction Fluid	10	<b>Repressurization Pump</b>	Distributes Purified Water
5	<b>Float Switch</b>	Turns RO System On/Off	11	<b>Output Valve</b>	Shuts off Supply to POU
6	<b>Storage Tank</b>	Stores Purified Water			

## Features and Benefits:

- Customizable System to Suit any Feed Water Quality
- High Recovery Rate (Product to Waste Ratio)\*
- Fully Equipped & Economical
- High Flow & Low Energy Membranes
- Up to 98.5% Salt Rejection
- Dual TDS Monitor
- Easy Maintenance & Servicing
- Compact & Space Saving
- Individually Tested & Sanitized
- 1 Year Limited Warranty
- Made in the U.S.A.

## Customizable Stages:

- Pre-Treatment: System can be customized with a chemical injection system, water softener, and/or carbon pre-filter to help preserve the membrane and extend the life of the system.
- Reverse Osmosis System: Hellenbrand's HRO4-2000 can be configured as a complete solution for many point-of-use and point-of-entry applications.
- Storage Tank: 225 Gallon white atmospheric storage tank (31"W x 74"H). Larger capacity tanks are available.
- Float Switch: Normally closed float switch automatically turns the reverse osmosis system on and off and comes pre-wired with 110 or 220 volts.
- Repressurization System: Delivery System provides proportional water delivery and features a built-in pressure switch, 1" NPT connections, and is available with 110 or 220 volts.

\* Recovery up to 75%. Recommended ratio is based on individual water quality.



**Hellenbrand, Inc.**  
 404 Moravian Valley Road  
 Waunakee, WI 53597  
[www.hellenbrand.com](http://www.hellenbrand.com)

111848  
 5/5/17-LBRY  
 © 2017-2018

Hellenbrand products are not for sale or distribution into the State of California effective 8/31/18